SEETRONIC

Product Data Sheet

Product Type Speaker Connector

Product Model SLDDM4

Customer Name

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Product Type	**Speaker Connector**	
Product Model	**SLDDM4**	

Product Features

- 4 pole loudspeaker socket, chrome housing, solder or 1/4" flat tabs
- Current rating continuous 30 Amp
- Rugged and durable metal housing design
- The built-in sealing gasket provides IP54 protection rating under the mated state

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Product Parameters

Item	Specification
Connection Type	Speaker
Gender	Male

Electrical Parameters

Item	Specification
Number of Contacts	4
Rated Current	30 A rms
Rated Voltage	250V AC
Contact Resistance	≤ 2 mΩ
Dielectric Strength	4 KV DC
Insulation Resistance	> 1000 MΩ
Attention	Cannot be used as an AC source or power connector!

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Mechanical Parameters

Item	Specification
Service Life	> 5000 mating cycles

Material and Environmental Parameters

Item	Specification
Housing	Zinc die-cast
Housing plating	Cr
Contacts	Cu alloy
Contact plating	Ag
Inner core	PA
Flame-retardant grade	UL 94-V0
Temperature range	-30°C ~ +80°C

Standards and Certifications

Standards	IEC 61984

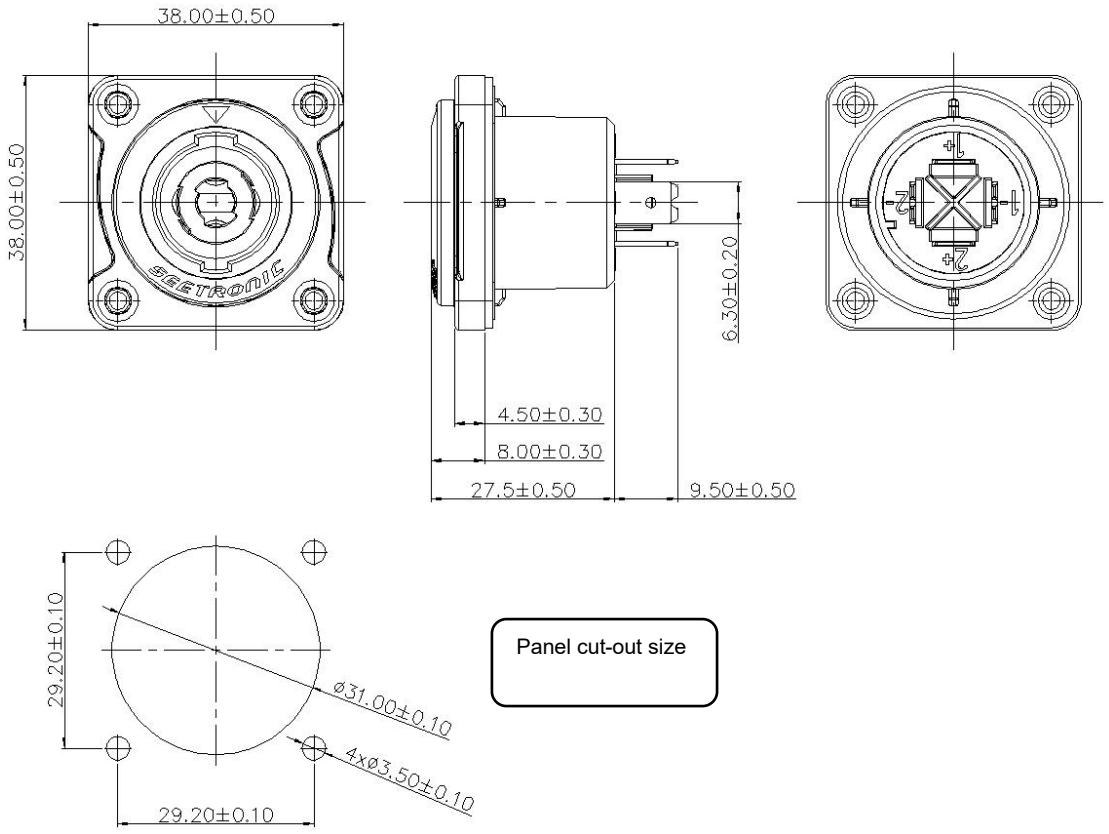
Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

Product Data Sheet

Product Drawing



Unit: mm

Packaging Method

PE bag packing, 1 pc per bag

50 pcs per inner carton, 5 inner cartons per master carton (250 pcs per master carton)

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

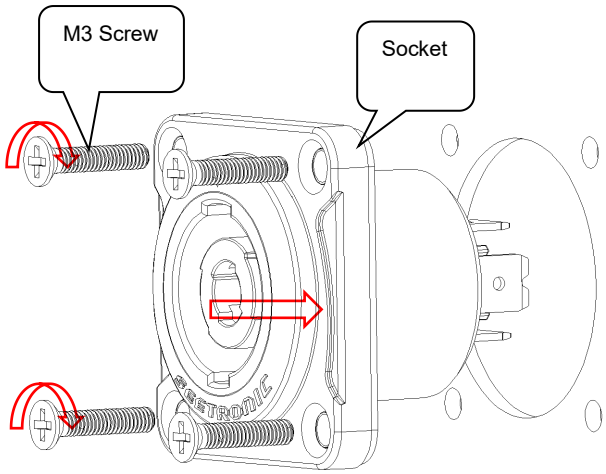
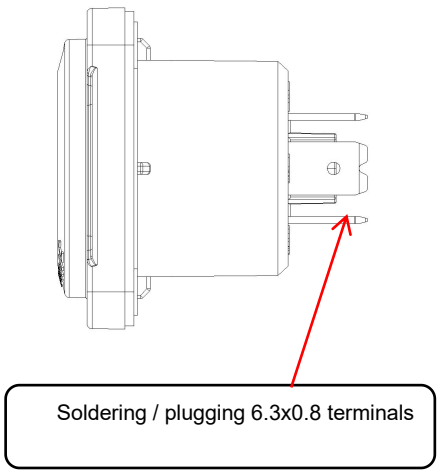
sales@seetronic.com
www.seetronic.com

Product Data Sheet

Accessory

☑ No accessories	☐ Back fastener plate
☐ Screws and Nuts	☐ Other

Assembly Instructions

Install on the front of the panel. Tighten the screws with 0.5 Nm torque in clockwise direction.	
Type of Terminals	

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com