SEETRONIC

Product Data Sheet

Product Type RJ45 Plug

Product Model SE8FC

Customer Name

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Product Type	**RJ45 Plug**	
Product Model	**SE8FC**	

Product Features

- Match with SE8MC-02-NEW for connecting cables and enabling aerial docking during mating
- Ideal for any harsh and demanding outdoor environment with waterproof rating IP65
- Cable connector carrier does not include RJ45 plug
- Cable O.D. 5-7 mm
- Sturdy die-cast shell and unique cable clamp
- Complies with CAT5e according to TIA/EIA 568 and ISO/IEC 11801 standard

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Product Parameters

Item	Specification
Connection type	RJ45
Gender	Female

Electrical Parameters

Item	Specification
Contact resistance	≤ 10 mΩ
Dielectric strength	1 KV DC
Insulation resistance	≥ 0.5 GΩ
Rated current	1.5 A
Rated voltage	50 V
Frequency range	1 - 100 MHz
Transmission performance	CAT5e

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Mechanical Parameters

Item	Specification
Cable OD	5-7mm
Insertion force	≤ 20 N
Withdrawal force	≤ 20 N
Service life	> 1000 mating cycles

Material and Environmental Parameters

Item	Specification
Boot	PA
Housing	Zinc alloy
Housing plating	Cr
Contacts	Cu alloy
Contact plating	Au
Flame-retardant grade	UL 94-V0
Temperature range	-30°C ~ +80°C

Standards and Certifications

Standards	TIA/EIA 586B, IEC11801

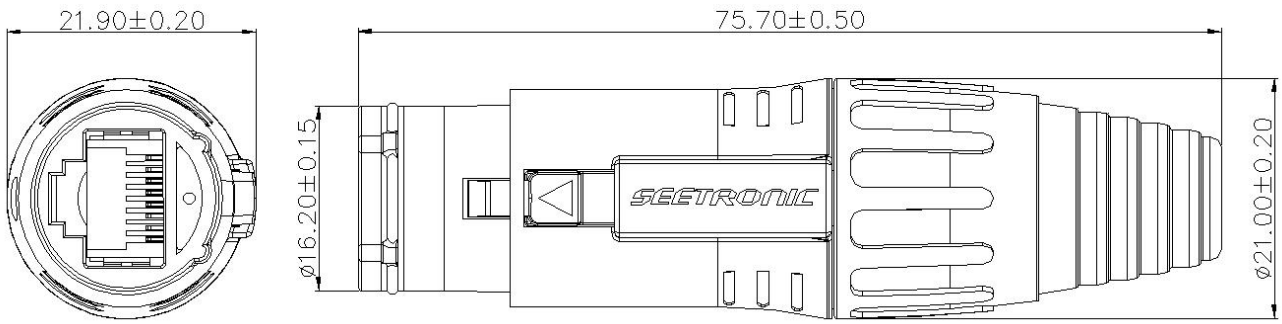
Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

Product Data Sheet

Product Drawing



Unit: mm

Packaging Method

PE bag packing: 1 pc housing per PE bag, 80 pcs boot per PE bag, 80 pcs cable clamp per PE bag
80 pcs housing + 1 bulk packed boot + 1 bulk packed cable clamp per inner cartons, 5 inner cartons per master carton (400 pcs per master carton)

Accessory

- ☑ No accessories
- ☐ Screws and Nuts
- ☐ Back fastener plate
- ☐ Other

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

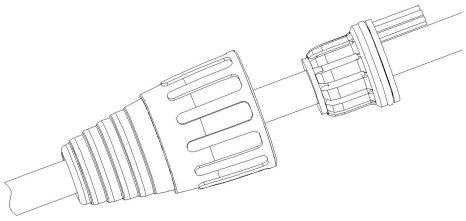

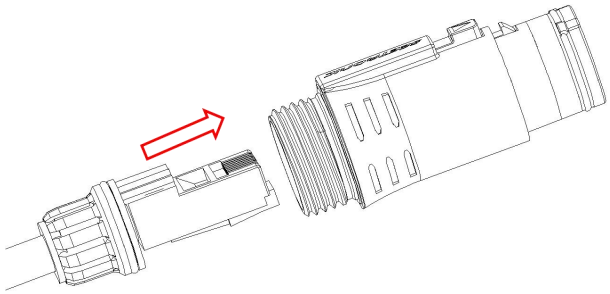
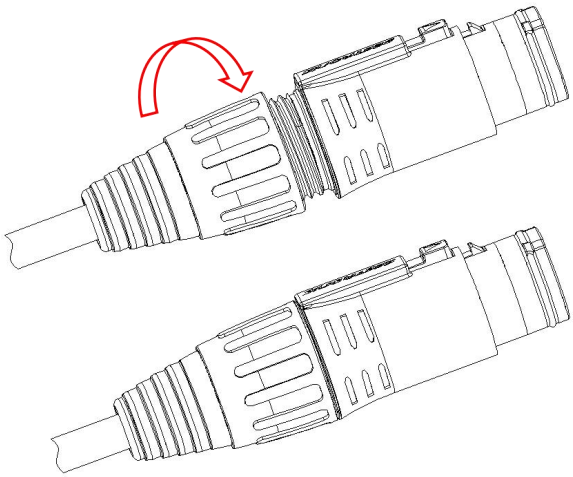
All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com

SEETRONIC

Product Data Sheet

Assembly Instructions

(1) Thread the cable through the boot and the waterproof cable clamp.	
(2) Assemble the cable with RJ45	
(3) Push the assembled cable clamp and RJ45 into the housing	
(4) After assembly of the cable clamp, RJ45 and housing, tighten the boot in a clockwise direction	

Above specifications and information may have tolerances and have been updated.
Every effort has been made to ensure correctness upon release of this data sheet.

All Rights Reserved 2023

sales@seetronic.com
www.seetronic.com